



The Future of Audio



TEAMCONNECT CEILING SOLUTIONS

Be heard in the room – everywhere.



Get in touch  
with us now!

[sennheiser.com/tccs](https://sennheiser.com/tccs)

Sennheiser electronic GmbH & Co. KG  
Am Labor 1, 30900 Wedemark, Germany

SENNHEISER



## TeamConnect Ceiling Solutions

TeamConnect Ceiling Solutions benefit from Trusted Sennheiser Audio Quality to offer audibly superior ceiling microphones for modern hybrid conferencing and presentations. The solutions are part of the Sennheiser TeamConnect Family and are designed for meeting rooms and lecture or collaboration spaces that are either mid-sized (TeamConnect Ceiling Medium) or large (TeamConnect Ceiling 2).

# Benefits

## Trusted Sennheiser Audio Quality




**TeamConnect Ceiling Solutions** employ **patented automatic dynamic beamforming** technology and the **TruVoicelift** function. These offer **perfect speech intelligibility** while allowing the speaker great flexibility in movement and position.

The high-quality built-in electret condenser capsules, which are **made in Germany**, have already proven themselves in numerous Sennheiser microphones. They ensure perfect speech intelligibility and offer outstanding audio quality by recording the entire meeting room.

These features enable the microphone to constantly determine the position of the person speaking, without manually needing to configure speaker zones ahead of time. This means that **no spoken word is lost** between the people in the meeting room and the external meeting participants.

## Efficient Setup



Thanks to the three options for mounting the microphone – **flush-mounted, surface-mounted and suspended** – the ceiling microphone integrates perfectly into your individual room design.

After integrating your ceiling microphone into your meeting environment via **Dante or Analog output**, the installation is very easy via **Power over Ethernet (PoE)**.

These features make it possible to set up the ceiling microphone with as little cost and time as possible.

## Management and Control



The outstanding benefits of the **Sennheiser Control Cockpit** software help you control and monitor the microphone in any company network.

High-precision audio settings offer maximum control: **Exclusion Zones** are designed to exclude unwanted noise; the **Priority Zone** highlights one speaker; while **TruVoicelift** allows significantly increased speech amplification in a meeting or conference room. This provides the speaker with the opportunity to be heard loudly and clearly even in the back of a room – similar to a stage microphone.

Your video recordings will also benefit by aligning with the **accurate talker positioning data** of our ceiling microphones via our media control protocol.



## Brand Agnostic Integration

The ceiling microphones can be easily used as an extension for any hybrid conferencing setup – for example with compatible solutions from our tested, selected partners.

They are certified for use with **Microsoft Teams\***, **DingTalk\***, **Tencent Meeting\*** and **Zoom\*** environments with different third-party manufacturers.

*\* Certification pending for TeamConnect Ceiling M.*

## Sleek Design



With their **shapes, mounting options, color variants** and the option for **customized painting** or **vinyl wrapping** the TeamConnect Ceiling Solutions integrate nearly invisibly in your room design, architecture and infrastructure.

## Sustainable Impact



For our packaging, we seek to avoid composite materials whenever possible, while **reducing the amount of plastics** in favor of paper and paperboard.

Our products are **'Made to last'**. We not only want our customers to enjoy their Sennheiser products for a long time, but also help to ensure that fewer products are thrown away. That's why we strive to provide **spare parts** for many of our products – over a **long period of time**.

## Real Problem Solver



The ceiling installation of TeamConnect Ceiling Solutions allows users to use the **full room potential** of a space **without any limitations**. Enjoy the benefits of a clear tabletop without any cables or additional devices and **flexibility** in re-arranging furniture without any compromises in microphone pickup and speech intelligibility.

## Security



The Sennheiser control interface (Sennheiser Control Cockpit or Sennheiser Sound Control Protocol) is secured by **encrypting communication** and **authenticating access** for controlling and monitoring the TeamConnect Ceiling, which support IT industry standards like **IEEE 802.1x** and **TLS 1.2** **\*\***.

*\*\* Only for TeamConnect Ceiling M*



Mid-sized meeting room equipped with TeamConnect Ceiling Medium.

## TeamConnect Ceiling Medium For mid-sized meeting rooms

With a coverage of up to 40 m<sup>2</sup>, our ceiling microphone TeamConnect Ceiling Medium (TCC M) is the right choice for mid-sized meeting rooms and lecture or collaboration spaces. With this solution, Sennheiser provides an additional design option to seamlessly include our audibly superior ceiling microphone into your meeting room. With all the great features of our trusted TeamConnect Ceiling 2 but in a more compact form, the TeamConnect Ceiling Medium microphone is a real problem-solver that allows cable-free tables and flexible furniture arrangement, while offering all of the TeamConnect Ceiling Solutions benefits like Trusted Sennheiser Audio Quality, efficient setup, brand agnostic integration, simple management and control, a sleek design and a sustainable impact.

### Mounting Options



Surface-Mounted



Suspended



Flush-Mounted



Large meeting room equipped with TeamConnect Ceiling 2.

## TeamConnect Ceiling 2 For large meeting rooms

With a coverage of up to 80 m<sup>2</sup>, there's still no better solution for larger meeting rooms and lecture or collaboration spaces than our industry-leading TeamConnect Ceiling 2 (TCC 2) ceiling microphone. With its functional square form the TCC 2 gracefully integrates into the design of modern meeting rooms – simply by replacing a ceiling tile. Like the TeamConnect Ceiling Medium, the TeamConnect Ceiling 2 is a real problem-solver that allows cable free tables und flexible furniture arrangement, while offering all of the TeamConnect Ceiling Solutions benefits like Trusted Sennheiser Audio Quality, efficient setup, brand agnostic integration, simple management and control, a sleek design and a sustainable impact.

### Mounting Options




Surface-Mounted



Suspended



Flush-Mounted

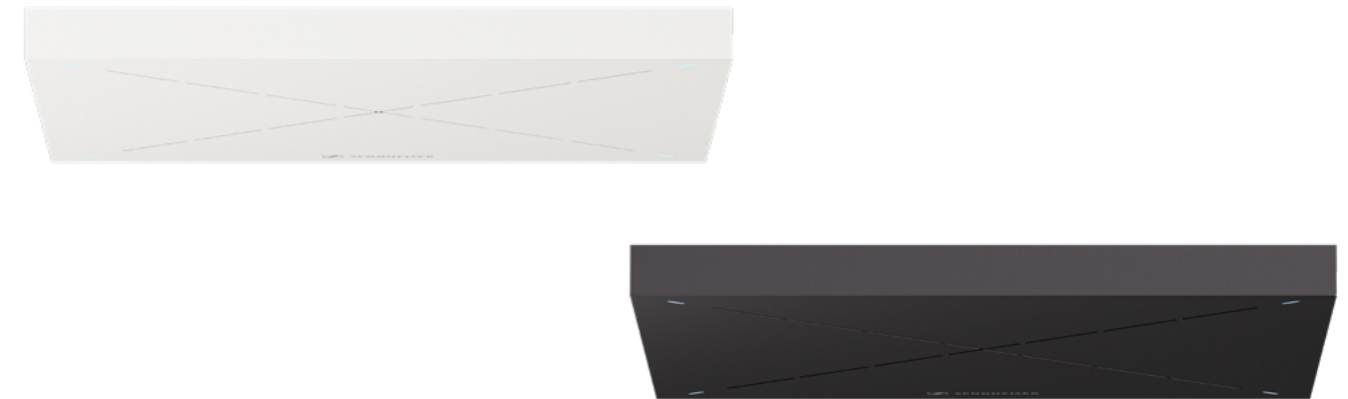

### TeamConnect Ceiling Medium

[Technical data](#)

#### Product properties

Dimensions (Ø x H)	477 x 46 mm (16 x 1.8 ")
Weight	approx. 4.8 kg (169.3 oz) (with accessories)
Audio Outputs	1 x 3-pin socket (fits Phoenix contact MCVW 1.5-3-ST-3.81) Two Dante™ Digital Audio Network sockets (RJ-45)
Network/Control	One RJ-45 Ethernet socket for PoE supply and data/control
Supply voltage	PoE IEEE 802.3af Class 3 IEEE 802.3at / Typ 2 / Class 4 (when cascaded)
Power consumption	approx. 8 W
Plenum rating	Tested according to UL 2043

#### Acoustic properties

Transducer principle	Pre-polarized condenser microphone
AF frequency response	100 Hz to 16,000 Hz
Sensitivity	0 dBV/Pa (988 mV/Pa)
Signal-to-noise ratio	77 dB (A)
Equivalent noise level	17 dB (A)
Number of microphone capsules	15
Pick-up pattern	Beam pattern
Max. sound pressure level	98 dB SPL
Dynamic range	81 dB (A)

#### Ambient Conditions

Temperature range	
Operation:	0 to 40 °C (32 - 104 °F)
Storage:	-10 to 60 °C (14 - 140 °F)
Relative air humidity	20 to 95%, non-condensing

### TeamConnect Ceiling 2

[Technical data](#)

#### Product properties

Dimensions (L x B x H)	590 x 590 x 43 mm
Weight	5670 g (12.5 lbs)
Audio Outputs	1 x 3-pin terminal (fits Phoenix contact MCVW 1.5-3-ST-3.81) 2 x Digital Dante Network Audio (RJ-45 Primary and Secondary)
Ethernet Control	1 x RJ-45 Ethernet Port for PoE power supply and data/control communication
Supply voltage	44 – 57 V DC PoE IEEE 802.3af Class 3
Power consumption	max. 8.8 W
Safety certification	UL 62368 certification (including UL 2043 testing and compliance)

#### Acoustic properties

Transducer principle	Pre-polarized condenser microphone
AF frequency response	160 Hz to 18,000 Hz
Sensitivity	0 dBV/Pa (988 mV/Pa)
Signal-to-noise ratio	83 dB (A)
Latency	4 ms
Equivalent noise level	11 dB (A)
Number of KE 10-237 microphone capsules	28
Pick-up pattern	Beam pattern
Max. sound pressure level	104 dB SPL
Dynamic range	93 dB (A)

#### Ambient Conditions

Temperature range	
Operation:	0 to 40 °C (32 - 104 °F)
Storage:	-10 to 60 °C (14 - 140 °F)
Relative air humidity	20 to 95%, non-condensing